

OKLAHOMA CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
P.O. BOX 52000
OKLAHOMA CITY, OK 73152-2000
(Rule 165:10-3-1)

API NUMBER: 137 27414 A

Approval Date: 02/19/2015
Expiration Date: 08/19/2015

Horizontal Hole Oil & Gas

Amend reason: CHANGE IN BOTTOM HOLE LOCATION, WELL NUMBER, SURFACE LOCATION & UPDATE ORDERS

AMEND PERMIT TO DRILL

WELL LOCATION: Sec: 16 Twp: 2N Rge: 4W County: STEPHENS
SPOT LOCATION: NW NW NE NE FEET FROM QUARTER: FROM NORTH FROM EAST
SECTION LINES: 226 1269

Lease Name: VIRGINIA Well No: 1H-4X Well will be 226 feet from nearest unit or lease boundary.
Operator Name: NEWFIELD EXPLORATION MID-CON INC Telephone: 9188781290 OTC/OCC Number: 20944 0

NEWFIELD EXPLORATION MID-CON INC
1 WILLIAMS CTR STE 1900
TULSA, OK 74172-0162

NATHAN MURRAY
2319 SHALMAR
SULPHUR OK 73086

Formation(s) (Permit Valid for Listed Formations Only):

	Name	Depth	Name	Depth
1	SPRINGER	11526	6	
2	GODDARD	13264	7	
3			8	
4			9	
5			10	

Spacing Orders: 624420
131585

Location Exception Orders:

Increased Density Orders:

Pending CD Numbers: 201501507
201501508
201501509

Special Orders:

Total Depth: 23812 Ground Elevation: 1189 **Surface Casing: 1500** Depth to base of Treatable Water-Bearing FM: 510

Under Federal Jurisdiction: No Fresh Water Supply Well Drilled: No Surface Water used to Drill: Yes

PIT 1 INFORMATION

Type of Pit System: CLOSED Closed System Means Steel Pits

Type of Mud System: WATER BASED

Chlorides Max: 5000 Average: 3000

Is depth to top of ground water greater than 10ft below base of pit? Y

Within 1 mile of municipal water well? N

Wellhead Protection Area? N

Pit is located in a Hydrologically Sensitive Area.

Category of Pit: C

Liner not required for Category: C

Pit Location is BED AQUIFER

Pit Location Formation: DUNCAN

Approved Method for disposal of Drilling Fluids:

D. One time land application -- (REQUIRES PERMIT) PERMIT NO: 15-29621
H. SEE MEMO

This permit does not address the right of entry or settlement of surface damages.
The duration of this permit is SIX MONTHS, except as otherwise provided by Rule 165: 10-3-1.
Rule 165: 10-3-4 (c) (7) (e) - The Operator shall give 24 Hours notice by telephone to the appropriate District Office of the Conservation Division as to when Surface Casing will be run.

PIT 2 INFORMATION

Type of Pit System: CLOSED Closed System Means Steel Pits

Type of Mud System: OIL BASED

Chlorides Max: 300000 Average: 200000

Is depth to top of ground water greater than 10ft below base of pit? Y

Within 1 mile of municipal water well? N

Wellhead Protection Area? N

Pit is located in a Hydrologically Sensitive Area.

Category of Pit: C

Liner not required for Category: C

Pit Location is BED AQUIFER

Pit Location Formation: DUNCAN

HORIZONTAL HOLE 1

Sec 04 Twp 2N Rge 4W County STEPHENS

Spot Location of End Point: NW NE NE NE

Feet From: NORTH 1/4 Section Line: 50

Feet From: EAST 1/4 Section Line: 440

Depth of Deviation: 12419

Radius of Turn: 740

Direction: 5

Total Length: 10230

Measured Total Depth: 23812

True Vertical Depth: 18066

End Point Location from Lease,
Unit, or Property Line: 50

Notes:

Category

Description

DEEP SURFACE CASING

2/19/2015 - G71 - APPROVED CONTINGENT ON NOTIFYING OCC FIELD STAFF IMMEDIATELY OF ANY LOSS OF CIRCULATION OR FAILURE TO CIRCULATE CEMENT TO SURFACE ON ANY CONDUCTOR OR SURFACE CASING

MEMO

2/19/2015 - G71 - PITS 1 & 2 - CLOSED SYSTEM=STEEL PITS PER OPERATOR REQUEST, WBM & OBM CUTTINGS CAPTURED IN CONCRETE-LINED PIT, SOLIDIFIED, AND BURIED ON SITE; PIT 2 - OBM TO VENDOR

PENDING CD - 201501507

3/27/2015 - G76 - (E.O.)(640) 4 & 9-2N-4W
EST MULTIUNIT HORIZONTAL WELL
X131585 4 & 9-2N-4W SPRG
X624420 9-2N-4W GDRD
50% 9-2N-4W
50% 4-2N-4W
NEWFIELD EXPLOR. MID-CON. INC.
REC. 3/27/2015 (MCKEOWN)

PENDING CD - 201501508

3/27/2015 - G76 - (E.O.) 4-2N-4W
X131585 SPRG
1 WELL
NEWFIELD EXPLOR. MID-CON. INC.
REC. 3/27/2015 (MCKEOWN)

This permit does not address the right of entry or settlement of surface damages.
The duration of this permit is SIX MONTHS, except as otherwise provided by Rule 165: 10-3-1.
Rule 165: 10-3-4 (c) (7) (e) - The Operator shall give 24 Hours notice by telephone to the appropriate District Office of the Conservation Division as to when Surface Casing will be run.

Category	Description
PENDING CD - 201501509	3/27/2015 - G76 - (E.O.) 4 & 9-2N-4W X131585 4 & 9-2N-4W SPRG X624420 9-2N-4W GDRD SHL 226 FNL, 1269 FEL 16-2N-4W COMPL. INT. (9-2N-4W) NCT 165 FSL, NCT 0 FNL, NCT 330 FEL COMPL. INT. (4-2N-4W) NCT O FSL, NCT 165 FNL, NCT 330 FEL BHL NCT 330 FEL NEWFIELD EXPLOR. MID-CON. INC. REC. 3/27/2015 (MCKEOWN)
SPACING - 131585	2/19/2015 - G76 - (640) 4 & 9-2N-4W EST SPRG, OTHERS
SPACING - 624420	2/19/2015 - G76 - (640)(HOR) 9-2N-4W EST GDRD POE TO BHL NCT 660' FB (COEXIST WITH SP. ORDER # 131585, SPRG)

This permit does not address the right of entry or settlement of surface damages.
The duration of this permit is SIX MONTHS, except as otherwise provided by Rule 165: 10-3-1.
Rule 165: 10-3-4 (c) (7) (e) - The Operator shall give 24 Hours notice by telephone to the appropriate District Office of the Conservation Division as to when Surface Casing will be run.

API 137-27414A

OKLAHOMA CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
P.O. BOX 52000
OKLAHOMA CITY, OK 73152-2000
(Rule 165:10-3-1)

API NUMBER: 137 27414

Approval Date: 02/19/2015
Expiration Date: 08/19/2015

Horizontal Hole Oil & Gas

Amend reason: EXTENDING LENGTH OF LATERAL TO A NEW SECTION AND CHANGING WELL NUMBER TO COINCIDE WITH NEW SECTION. WE NEED AN EMERGENCY PERMIT TO DRILL.

AMEND PERMIT TO DRILL

WELL LOCATION: Sec: 16 Twp: 2N Rge: 4W County: STEPHENS
SPOT LOCATION: NW NW NE NE FEET FROM QUARTER FROM NORTH FROM EAST
SECTION LINES 226 266

Application for Intent to Drill

Lease Name: VIRGINIA Well No: 1H-4X Well will be 226 feet from nearest unit or lease boundary.

Operator Name: NEWFIELD EXPLORATION MID-CON INC Telephone: 9188781290 DTG/OCC Number: 20944 0

NEWFIELD EXPLORATION MID-CON INC
1 WILLIAMS CTR STE 1900
TULSA, OK 74172-0162

NATHAN MURRAY
2319 SHALMAR
SULPHUR OK 73086

Formation(s) (Permit Valid for Listed Formations Only):

	Name	Depth	Name	Depth
1	GODDARD	13264		6
2	Springer	11526		7
3				8
4				9
5				10

Spacing Orders: 624420 Location Exception Orders: Increased Density Orders:
131585

Pending CD Numbers: 201501507 Special Orders:
201501508
201501509

Total Depth: 23812 Ground Elevation: 1189 Surface Casing: 1500 Depth to base of Treatable Water-Bearing FM: 510

Under Federal Jurisdiction: No Fresh Water Supply Well Drilled: No Surface Water used to Drill: Yes

PIT 1 INFORMATION

Type of Pit System: CLOSED Closed System Means Steel Pits

Type of Mud System: WATER BASED

Chlorides Max: 5000 Average: 3000

Is depth to top of ground water greater than 10ft below base of pit? Y

Within 1 mile of municipal water well? N

Wellhead Protection Area? N

Pit is located in a Hydrologically Sensitive Area.

Category of Pit: C

Liner not required for Category: C

Pit Location is BED AQUIFER

Pit Location Formation: DUNCAN

Approved Method for disposal of Drilling Fluids:

D. One time land application -- (REQUIRES PERMIT)

PERMIT NO: 15-29621

H. SEE MEMO

TEMPORARY AUTHORIZATION TO DRILL
Expiration Date: 3/27/2015
Signature: *Nathan Murray for Virginia Hollinger*
165:10-3-1-1

165:10-3-2a

This permit does not address the right of entry or settlement of surface damages.
The duration of this permit is SIX MONTHS, except as otherwise provided by Rule 165: 10-3-1.
Rule 165: 10-3-4 (c) (7) (e) - The Operator shall give 24 Hours notice by telephone to the appropriate District Office of the Conservation Division as to when Surface Casing will be run.

PIT 2 INFORMATION

Type of Pit System: CLOSED Closed System Means Steel Pits

Type of Mud System: OIL BASED

Chlorides Max: 300000 Average: 200000

Is depth to top of ground water greater than 10ft below base of pit? Y

Within 1 mile of municipal water well? N

Wellhead Protection Area? N

Pit is located in a Hydrologically Sensitive Area.

Category of Pit: C

Liner not required for Category: C

Pit Location is BED AQUIFER

Pit Location Formation: DUNCAN

HORIZONTAL HOLE 1

Sec 04 Twp 2N Rge 4W County STEPHENS

Spot Location of End Point: NW NE NE NE

Feet From: NORTH 1/4 Section Line: 50

Feet From: EAST 1/4 Section Line: 440

Depth of Deviation: 1249

Radius of Turn: 740

Direction: 5

Total Length: 10230

Measured Total Depth: 23812

True Vertical Depth: 18066

End Point Location from Lease,
Unit, or Property Line: 50

Notes:

Category

AMENDMENT

DEEP SURFACE CASING

Application for Intent to Drill

Description

3/20/2015 - BRSDNL0 - EXTENDING LENGTH OF LATERAL INTO NEW SECTION AND CHANGING WELL NUMBER TO COINCIDE WITH NEW SECTION.
COPY OF EMERGENCY APPLICATIONS SHOULD BE MAILED TO YOU SHORTLY.

2/19/2015 - G71 - APPROVED CONTINGENT ON NOTIFYING OCC FIELD STAFF IMMEDIATELY OF ANY LOSS OF CIRCULATION OR FAILURE TO CIRCULATE CEMENT TO SURFACE ON ANY CONDUCTOR OR SURFACE CASING

Bob Anthony
Commissioner

Jeff Cloud
Commissioner

Dana Murphy
Commissioner

OKLAHOMA

Corporation Commission

P.O. BOX 52000
OKLAHOMA CITY OKLAHOMA 73152-2000

255 Jim Thorpe Building
Telephone: (405)521-2302
FAX: (405)521-3099

OIL & GAS CONSERVATION DIVISION



Lori Wrotenbery, Director

November 15, 2010

J. Blake Scott
Scott Environmental Services, Inc.
P.O. Box 6215
Longview, Texas 75608

RE: Requests for variances to liner requirements for pits used to contain oil-based cuttings.

Dear Mr. Scott:

This is in response to your inquiry concerning the procedure by which operators of wells in the State of Oklahoma regulated by the Commission's Oil and Gas Conservation Division may request variances to liner requirements for pits used to contain oil-based cuttings (OBC). OAC 165:10-7-16(b)(1)(B)(iv) provides that any pit used to contain oil-based drilling fluids, cuttings and/or completion/fracture/workover fluids shall be required to have a geomembrane liner. OAC 165:10-7-16(b)(5) states that any variance from the liner requirements of OAC 165:10-7-16 may be granted by the Manager of the Technical Services Department after receipt of a written request and supporting documentation required by the Department. Operators must submit written requests for variances to liner requirements for pits used to contain OBC to the Commission's Technical Services Department (TSD) Manager as attachments to initial or amended OCC Form 1000 Applications to Drill, Recomplete or Reenter.

The TSD Manager will require operators to submit documentation in support of requests for variances. Variances to liner requirements for pits containing OBC are not effective until granted by the TSD Manager. If operators requesting variances to liner requirements for pits containing OBC fail to submit acceptable documentation to the TSD Manager, or if such variance requests are denied, then operators are required to deposit the solidified OBC in pits containing geomembrane liners and close the pits as required by OAC 165:10-7-16, or otherwise dispose of the solidified OBC in accordance with Commission rules.

If the processes employed by your company and any other entity demonstrate through the submission of laboratory analyses, chain of custody forms and any other documentation required by the TSD Manager that the solidified OBC for which a variance from the pit liner requirements is sought meet acceptable criteria, then the TSD Manager could approve such variance requests submitted by operators.


Your company has demonstrated in three separate trials to date that solidified OBC for which variances were sought by operators have met the criteria of the Technical Services Department for burying such materials in pits with no geomembrane liners.

SERVICE • ASSISTANCE • COMPLIANCE
EXCELLENCE IS OUR STANDARD

API 137-27414A

If you have any questions concerning the foregoing, please contact me at (405) 522-2763.

Sincerely,



Tim Baker
Manager, Pollution Abatement Department
Oklahoma Corporation Commission

Cc: Lori Wrotenberg, Ron Dunkin, Wayne Wright, Grant Ellis, Tony Cupp, Terry Grooms,
Gayland Darity, Sally Shipley, Keith Thomas, Susan Conrad, Jim Hamilton, Connie Moore

API 137-27414A

NEWFIELD



Newfield Exploration Mid-Continent, Inc.
One Williams Center; Suite 1900
Tulsa, OK 741729
918-582-2690
Fax: 918-732-1787

February 19, 2015

Oklahoma Corporation Commission
Oil & Gas Conservation Division
P.O. Box 52000-2000
Oklahoma City, Oklahoma 73152-2000

ATTN: Manager of the Technical Services Department

RE: Liner Variance Request
Virginia 1H-9
Sec 16-02N-04W, Stephens County

Dear Sir:

We are requesting a variance to the liner requirements for the burial of oil-based cuttings (OBC) as stated in rules of the Oklahoma Corporation Commission (OCC). We intend to bury the OBC from the above mentioned well using Scott Environmental Services Inc.'s (SESI) stabilization and solidification process, DuroSM. Specifically, the request for a variance is because the chosen process cannot be practically carried out under current Oklahoma rules due to the rules stating that OBC burial requires a geomembrane liner but the rules do not allow stirring within geomembrane lined pits.

In a letter dated November 15, 2010, Mr. Tim Baker confirmed that use of a DuroSM process had met the requirements of the Commission. It is requested that a variance be approved for this well site, provided that the following conditions are met:

1. A soil liner may be used instead of a geomembrane liner if the unconfined compressive strength (UCS) of the DuroSM material is at least 70 pounds per square inch (psi), or
2. No liner is required if the DuroSM material meets all of the following conditions:
 - a. A permeability of not more than 1×10^{-6} cm/sec;
 - b. A UCS of at least 35 psi; and
 - c. Concentrations in a leachate of the DuroSM material according to EPA's SPLP procedure do not exceed the following values for the constituents named:
 - i. Total Petroleum Hydrocarbons, 100 mg/l;
 - ii. pH, 12.49 SU, plus a lower limit no less than 6;
 - iii. Arsenic, 5.00 mg/l;
 - iv. Barium, 100 mg/l;
 - v. Cadmium, 1.00 mg/l;
 - vi. Chromium, 5.00 mg/l;
 - vii. Lead, 5.00 mg/l;

API 137-27414 A

- viii. Mercury, 0.20 mg/l;
- ix. Selenium, 1.00 mg/l;
- x. Silver, 5.00 mg/l;
- xi. Zinc, 5.00 mg/l; and
- xii. Benzene, 0.5 mg/l.

The permeability value specified in item 2(a) is the same as that required for a standard soil liner, so that in effect the DuroSM processed material becomes its own liner but is even more effective, because the low permeability extends throughout the bulk of the DuroSM material.

Conformance with the specified criteria is determined on laboratory samples made with a representative sample of the waste to be subjected to the DuroSM process. The results of the testing will be provided to the Pollution Abatement Department of the OCC.

Your prompt attention to this matter is appreciated.

Sincerely,





Daniele Burris
Sr. Regulatory Specialist

API 13727414A

Permit Plat


M & M Land Surveying, Inc.
520 "E" Street NW. Ardmore, OK. 73401
Office 580-226-0446 Mobile 580-221-4999 Fax 580-226-7158

Company Name: Newfield Exploration Mid-Continent, Inc. Lease Name: Virginia # 1H-4X
Section 16 Township 2 North Range 4 West County Stephens Oklahoma
Surface Location 226' FNL - 1269' FEL Elevation 1189'

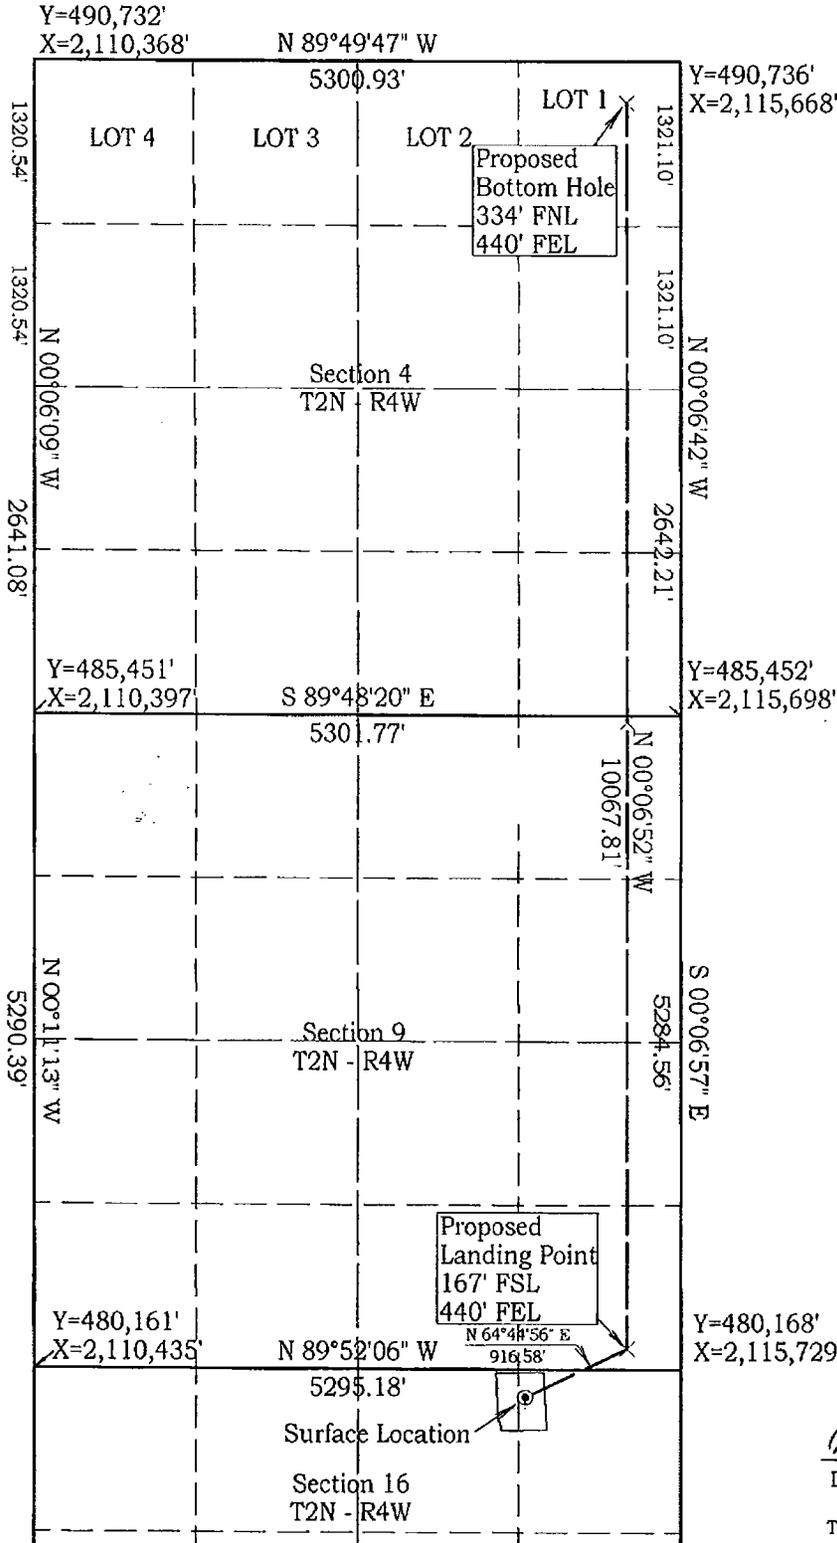

Bearings are based on Geodetic North. Unless otherwise noted.
Scale: 1" = 1500'
Invoice 15010a
Date 1/15/15

Coordinates were derived from GPS RTK methods and are only accurate within ±10 feet
Location GPS NAD 27 Oklahoma South
Surface Location
Latitude: 34.65161°
Longitude: 97.61940°
Y= 479,951'
X = 2,114,466'



D. Harry McClintick
D. Harry McClintick, R.P.L.S. # 1367, CA # 3093

This location has been staked according to the best official survey records available to us, but its accuracy is not guaranteed. Please review this plat and notify us immediately of any discrepancy.